



**GRUP** IMAJ



**SYMETRY**  
POINT

# INDEX



**TURTLE SERIES** 2-3



**SHARK SERIES** 4-5



**FALCON SERIES** 6-7



**WOLF SERIES** 8-9



**FOX SERIES** 10-11



**LED FLOODLIGHT  
LION SERIES** 12-13




**LED FLOODLIGHT  
WOLF SERIES** 14-15



**LED FLOODLIGHT  
HAWK SERIES** 16-17



**INDOOR LED LIGHTING  
FLAT-G** 18



**INDOOR LED LIGHTING  
LUNA** 18



**INDOOR LED LIGHTING  
INDUSTRIAL PROOF** 19



**INDOOR LED LIGHTING  
SURFACE SPEEDLINE** 19



**INDOOR LED LIGHTING  
SUMBA** 20



**INDOOR LED LIGHTING  
MINSU** 20

*LED LIGHTING  
LUMINAIRES*

# LED STREET LIGHTING

## LUMINAIRE

TURTLE  
SERIES



### APPLICATIONS

- Streets and Roads
- Parks and Car Parks
- Residential Areas
- Industrial Areas

### FEATURES

- Road lighting complying with relevant standards and glare regulations
- Long life due to thermal design cooling block
- IP66 rating
- Manufacturing complying with EN 60598-1
- Made in Turkey / Entirely domestic manufacturing except for Led and drivers







## TURTLE ROAD LIGHTING LUMINAIRES

	350mA		530mA		700mA		1050mA		Color Temperature	CRI						
	LED MODULE	LUMINAIRE	LED MODULE	LUMINAIRE	LED MODULE	LUMINAIRE	LED MODULE	LUMINAIRE								
12LED	10 W	1845 lm	11 W	1715 lm	17 W	3060 lm	19 W	2845 lm	3000 K 4000 K 5000 K 5700 K 6500 K	CRI > 70						
24LED	20 W	3690 lm	22 W	3430 lm	34 W	6120 lm	38 W	5690 lm								
36LED	30 W	5535 lm	33 W	5145 lm	51 W	9180 lm	57 W	8535 lm								
		184 lm/W		155 lm/W		180 lm/W		150 lm/W		170 lm/W		145 lm/W		165 lm/W		140 lm/W

## LIGHT DISTRIBUTION CURVES

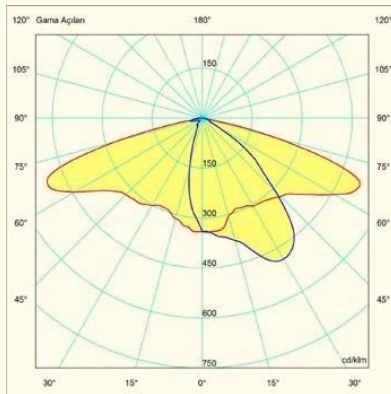

## DIMENSIONS

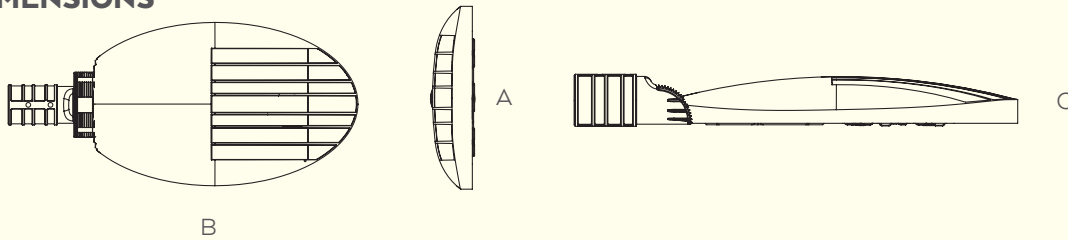

Model No	A (mm)	B (mm)	C (mm)
TURTLE	292	630	71

# LED STREET LIGHTING

## LUMINAIRE

SHARK  
SERIES



### APPLICATIONSS

- Streets and Roads
- Parks and Car parks
- Residential Areas
- Industrial Areas

### FEATURES


- Road lighting complying with relevant standards and glare regulations
- Long life due to thermal design cooling block
- IP66 rating
- Entirely domestic manufacturing except for Led and drivers




## SHARK LED ROAD LIGHTING LUMINAIRE

	350mA				530mA				700mA				1050mA				Color Temperature	CRI
	LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE			
12LED	13 W	2080 lm	15 W	1784 lm	19 W	2945 lm	21 W	2499 lm	25 W	3625 lm	27 W	3105 lm	37 W	4921 lm	40 W	4120 lm	3000 K 4000 K 5000 K 6000 K 6500 K	CRI > 70
24LED	26 W	5160 lm	29 W	3567 lm	38 W	5890 lm	42 W	4998 lm	50 W	7250 lm	54 W	6210 lm	74 W	9842 lm	80 W	8240 lm		
36LED	39 W	6240 lm	43 W	5290 lm	57 W	8835 lm	62 W	7440 lm	75 W	10875 lm	81 W	9315 lm	111 W	14765 lm	120 W	12360 lm		
48LED	52 W	8320 lm	58 W	7135 lm	76 W	11780 lm	83 W	9960 lm	100 W	14500 lm	108 W	12420 lm	148 W	19685 lm	160 W	16480 lm		

### LIGHT DISTRIBUTION CURVES

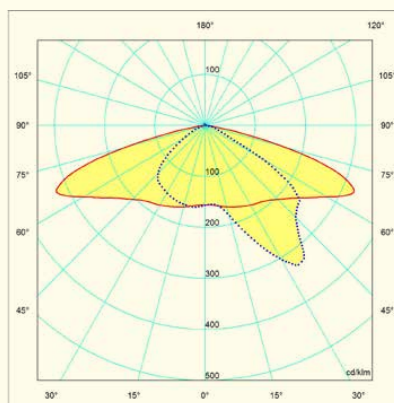

### DIMENSIONS

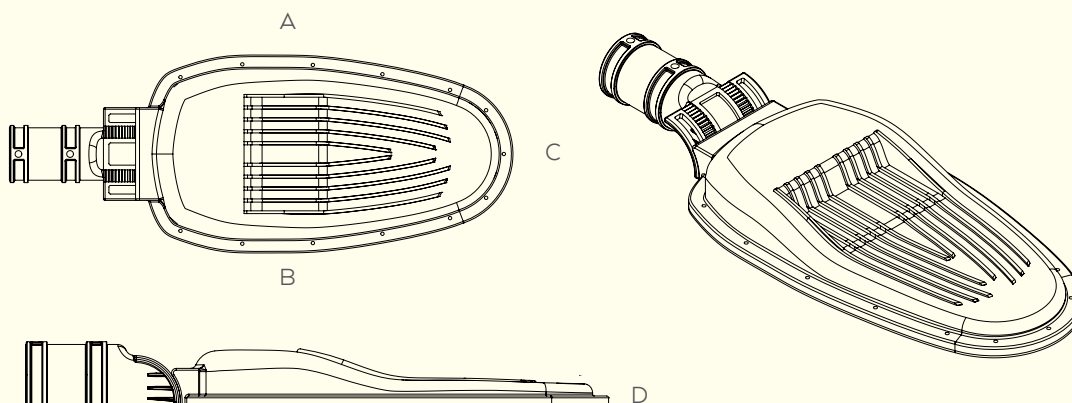

Kod	A (mm)	B (mm)	C (mm)	D (mm)
SHARK S	630	475	240	65
SHARK M	690	535	305	65

# LED STREET LIGHTING

## LUMINAIRE

FALCON

SERIES



### APPLICATIONS

- Streets and Roads
- Parks and Car parks
- Residential Areas
- Industrial Areas

### FEATURES


- Road lighting complying with relevant standards and glare regulations
- Long life due to thermal design cooling block
- IP66 rating
- Entirely domestic manufacturing except for Led and drivers




## SHARK LED ROAD LIGHTING LUMINAIRE

	350mA				530mA				700mA				1050mA				Color Temperature	CRI
	LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE			
12LED	13 W	2080 lm	15 W	1784 lm	19 W	2945 lm	21 W	2499 lm	25 W	3625 lm	27 W	3105 lm	37 W	4921 lm	40 W	4120 lm	3000 K 4000 K 5000 K 6000 K 6500 K	CRI > 70
24LED	26 W	5160 lm	29 W	3567 lm	38 W	5890 lm	42 W	4998 lm	50 W	7250 lm	54 W	6210 lm	74 W	9842 lm	80 W	8240 lm		
36LED	39 W	6240 lm	43 W	5290 lm	57 W	8835 lm	62 W	7440 lm	75 W	10875 lm	81 W	9315 lm	111 W	14765 lm	120 W	12360 lm		
48LED	52 W	8320 lm	58 W	7135 lm	76 W	11780 lm	83 W	9960 lm	100 W	14500 lm	108 W	12420 lm	148 W	19685 lm	160 W	16480 lm		

### LIGHT DISTRUBUTION CURVES

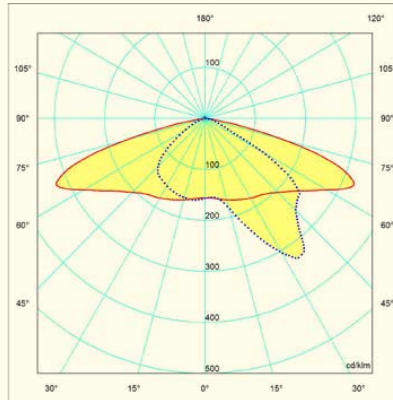

### DIMENSIONS

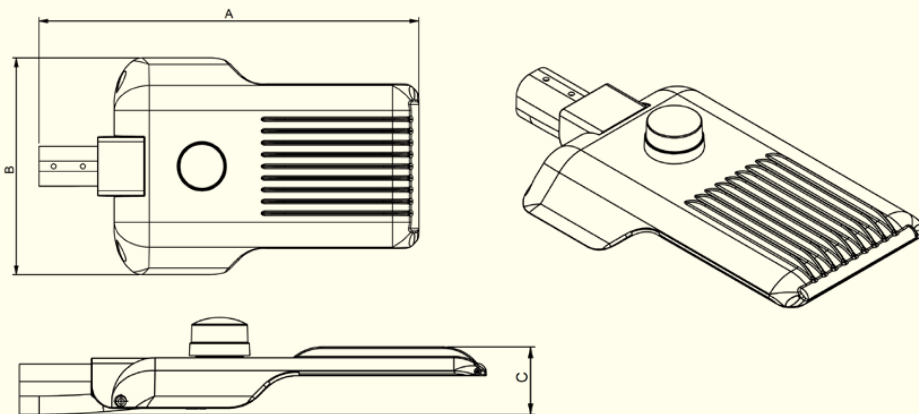

Kod	A (mm)	B (mm)	C (mm)
SHARK S	650	370	95

# LED STREET LIGHTING

## LUMINAIRE

WOLF  
SERIES



### APPLICATIONS

- Streets and Roads
- Parks and Car Parks
- Residential Areas
- Industrial Areas

### FEATURES


- Road lighting complying with relevant standards and glare regulations
- Long life due to thermal design cooling block
- IP66 rating
- Manufacturing complying with EN 60598-1
- Made in Turkey / Entirely domestic manufacturing except for Led and drivers






## WOLF LED ROAD LIGHTING LUMINAIRE

	350mA				530mA				700mA				1050mA				Color Temperature	CRI
	LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE			
12LED	13 W	2080 lm	15 W	1784 lm	19 W	2945 lm	21 W	2499 lm	25 W	3625 lm	27 W	3105 lm	37 W	4921 lm	40 W	4120 lm	3000 K 4000 K 5000 K 6000 K 6500 K	CRI > 70
24LED	26 W	5160 lm	29 W	3567 lm	38 W	5890 lm	42 W	4998 lm	50 W	7250 lm	54 W	6210 lm	74 W	9842 lm	80 W	8240 lm		
36LED	39 W	6240 lm	43 W	5290 lm	57 W	8835 lm	62 W	7440 lm	75 W	10875 lm	81 W	9315 lm	111 W	14765 lm	120 W	12360 lm		
48LED	52 W	8320 lm	58 W	7135 lm	76 W	11780 lm	83 W	9960 lm	100 W	14500 lm	108 W	12420 lm	148 W	19685 lm	160 W	16480 lm		
60LED	65 W	10400 lm	71 W	8735 lm	95 W	14725 lm	103 W	12360 lm	125 W	18125 lm	135 W	15525 lm	185 W	24605 lm	200 W	20600 lm		
72LED	78 W	12480 lm	86 W	10580 lm	114 W	17670 lm	124 W	14880 lm	150 W	21750 lm	162 W	18630 lm	222 W	29526 lm	240 W	24720 lm		
84LED	91 W	14560 lm	99 W	12180 lm	133 W	20615 lm	145 W	17400 lm	175 W	25375 lm	189 W	21735 lm	*	*	*	*		
96LED	104 W	16640 lm	113 W	13900 lm	152 W	23560 lm	165 W	19800 lm	200 W	29000 lm	216 W	24840 lm	*	*	*	*		
	160 lm / W		123 lm / W		155 lm / W		120 lm / W		145 lm / W		115 lm / W		133 lm / W		103 lm / W			



Model No	A (mm)	B (mm)	C (mm)	D (mm)
WOLF - 1	120	500	135	100
WOLF - 2	160	500	135	100
WOLF - 3	255	500	135	100
WOLF - 4	305	500	135	100
WOLF - 5	405	500	135	100
WOLF - 6	505	500	135	100

## DIMENSIONS



# LED STREET LIGHTING

## LUMINAIRE

FOX

SERIES



### APPLICATIONSS

- Streets and Roads
- Parks and Car parks
- Residential Areas
- Industrial Areas

### FEATURES


- Road lighting complying with relevant standards and glare regulations
- Long life due to thermal design cooling block
- IP66 rating
- Manufacturing complying with TS EN 60598-1
- Entirely domestic manufacturing except for Led and drivers






### FOX LED ROAD LIGHTING LUMINAIRE

		350mA		530mA		700mA		1050mA		Color Temperature	CRI							
		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE										
16LED	17 W	2766 lm	20 W	2373 lm	25 W	3917 lm	28 W	3324 lm	33 W	4821 lm	36 W	4130 W	49 W	6545 lm	53 W	5480 lm	3000 K 4000 K 5000 K 6000 K 6500 K	CRI > 70
32LED	35 W	6863 lm	39 W	4744 lm	51 W	7834 lm	56 W	6647 lm	67 W	9643 lm	72 W	8259 W	98 W	13090 lm	106 W	10959 lm		
48LED	52 W	8299 lm	57 W	7036 lm	76 W	11751 lm	82 W	9895 lm	100 W	14464 lm	108 W	12389 W	148 W	19637 lm	160 W	16439 lm		
64LED	69 W	11066 lm	77 W	9490 lm	101 W	15667 lm	110 W	13247 lm	133 W	19285 lm	144 W	16519 W	197 W	26181 lm	213 W	21918 lm		
80LED	86 W	13832 lm	94 W	11618 lm	126 W	19584 lm	137 W	16439 lm	166 W	24106 lm	180 W	20648 W	*	*	*	*		
		160 lm / W		123 lm / W		155 lm / W		120 lm / W		145 lm / W		115 lm / W		133 lm / W		103 lm / W		

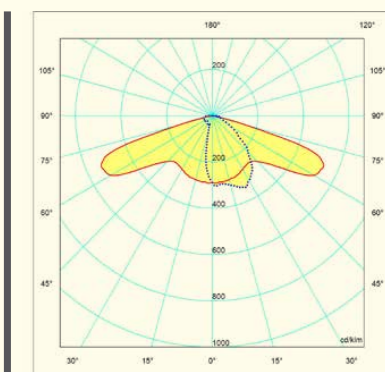

### DIMENSIONS

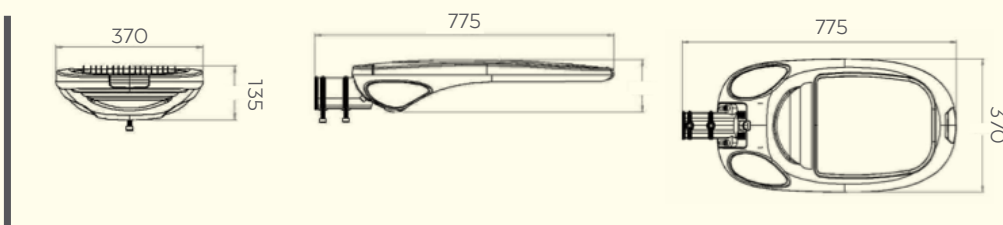

# LED FLOODLIGHT

LION  
SERIES



## APPLICATIONS

- Sports Areas
- Parks and Car parks
- Residential Areas
- Industrial Areas
- Port Lighting
- Factory Lighting
- Architectural Lighting

## FEATURES

- Entirely domestic manufacturing except for Led and drivers
- Long life due to thermal design cooling block
- IP66 rating
- Manufacturing complying with TS EN 60598-2-5




## LION LED FLOODLIGHT

### LION LED ROAD LIGHTING LUMINAIRE


		350mA				530mA				700mA				1050mA				Color Temperature	CRI
		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE			
LION-S	36 LED	34 W	5950 lm	37 W	4730 lm	54 W	9010 lm	59 W	7170 lm	70 W	11170 lm	75 W	8890 lm	108 W	15690 lm	116 W	12480 lm	3000 K 4000 K 5000 K 6500 K	CRI > 70
LION-M	48 LED	*	*	*	*	*	*	*	*	93 W	14900 lm	100 W	11850 lm	144 W	20920 lm	153 W	16740 lm		
LION-L	60 LED	*	*	*	*	*	*	*	*	*	*	*	*	180 W	26150 lm	200 W	21800 lm		
		175 lm / w		128 lm / w		167 lm / w		122 lm / w		160 lm / w		118 lm / w		145 lm / w		110 lm / w			

		350mA				530mA				700mA				1050mA				Color Temperature	CRI
		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE			
LION-S	72 LED	68 W	11910 lm	74 W	9470 lm	101 W	17170 lm	109 W	13430 lm	*	*	*	*	*	*	*	*	3000 K 4000 K 5000 K 6500 K	CRI > 70
LION-M	96 LED	91 W	15880 lm	98 W	12630 lm	135 W	22950 lm	145 W	17900 lm	185 W	29800 lm	207 W	24200 lm	*	*	*	*		
LION-L	120 LED	*	*	*	*	*	*	*	*	240 W	38210 lm	258 W	30200 lm	276 W	41310 lm	297 W	33873 lm		
		175 lm / w		128 lm / w		170 lm / w		123 lm / w		160 lm / w		118 lm / w		151 lm / w		115 lm / w			

### LIGHT DISTRIBUTION CURVES

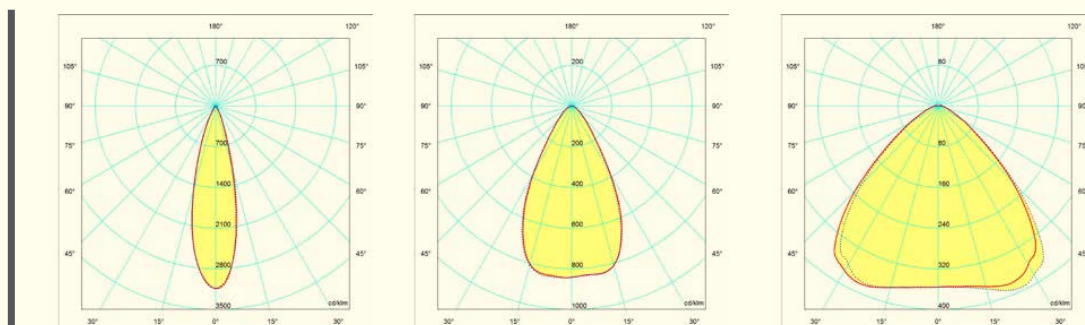

### DIMENSIONS

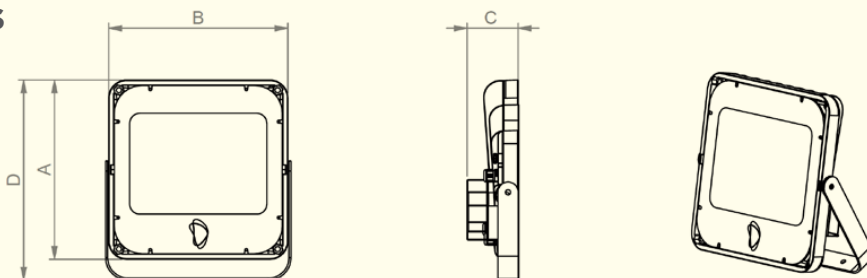

Kod	A (mm)	B (mm)	C (mm)	D (mm)
LION-L	350	350	100	445
LION-M	300	300	100	395
LION-S	250	250	100	345

# LED FLOODLIGHT

WOLF  
SERIES



## APPLICATIONS

- Sports Areas
- Parks and Car parks
- Residential Areas
- Industrial Areas
- Port Lighting
- Factory Lighting
- Architectural Lighting

## FEATURES



- Entirely domestic manufacturing except for Led and drivers
- Long life due to thermal design cooling block
- IP66 rating
- Manufacturing complying with TS EN 60598-2-5








## WOLF LED FLOODLIGHT

	350mA				530mA				700mA				1050mA				Color Temperature	CRI
	LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE			
12LED	13 W	2080 lm	15 W	1784 lm	19 W	2945 lm	21 W	2499 lm	25 W	3625 lm	27 W	3105 lm	37 W	4921 lm	40 W	4120 lm	3000 K 4000 K 5000 K 6000 K 6500 K	CRI > 70
24LED	26 W	5160 lm	29 W	3567 lm	38 W	5890 lm	42 W	4998 lm	50 W	7250 lm	54 W	6210 lm	74 W	9842 lm	80 W	8240 lm		
36LED	39 W	6240 lm	43 W	5290 lm	57 W	8835 lm	62 W	7440 lm	75 W	10875 lm	81 W	9315 lm	111 W	14765 lm	120 W	12360 lm		
48LED	52 W	8320 lm	58 W	7135 lm	76 W	11780 lm	83 W	9960 lm	100 W	14500 lm	108 W	12420 lm	148 W	19685 lm	160 W	16480 lm		
60LED	65 W	10400 lm	71 W	8735 lm	95 W	14725 lm	103 W	12360 lm	125 W	18125 lm	135 W	15525 lm	185 W	24605 lm	200 W	20600 lm		
72LED	78 W	12480 lm	86 W	10580 lm	114 W	17670 lm	124 W	14880 lm	150 W	21750 lm	162 W	18630 lm	222 W	29526 lm	240 W	24720 lm		
84LED	91 W	14560 lm	99 W	12180 lm	133 W	20615 lm	145 W	17400 lm	175 W	25375 lm	189 W	21735 lm	*	*	*	*		
96LED	104 W	16640 lm	113 W	13900 lm	152 W	23560 lm	165 W	19800 lm	200 W	29000 lm	216 W	24840 lm	*	*	*	*		
	160 lm / W		123 lm / W		155 lm / W		120 lm / W		145 lm / W		115 lm / W		133 lm / W		103 lm / W			

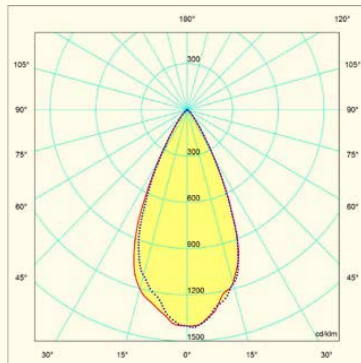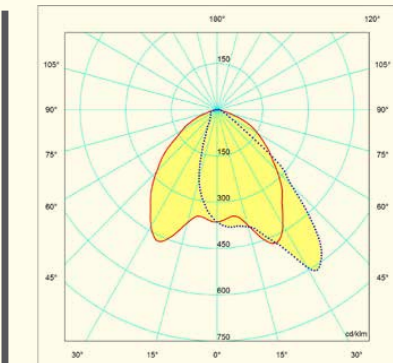

Model No	A (mm)	B (mm)	C (mm)	D (mm)
WOLF - 1	460	375	125	120
WOLF - 2	460	375	165	120
WOLF - 3	460	375	255	120
WOLF - 4	460	375	305	120
WOLF - 5	460	375	405	120
WOLF - 5	460	375	505	120

### DIMENSIONS

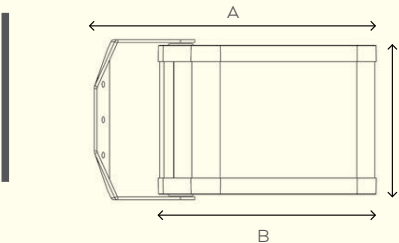

# LED FLOODLIGHT

HAWK  
SERIES



## APPLICATIONS

- Sports Areas
- Parks and Car parks
- Residential Areas
- Industrial Areas
- Port Lighting
- Factory Lighting
- Architectural Lighting

## FEATURES

- Entirely domestic manufacturing except for Led and drivers
- Long life due to thermal design cooling block
- IP66 rating
- Manufacturing complying with TS EN 60598-2-5




## HAWK LED FLOODLIGHT

	POWER		Lumious Flux (LM)		Color Temperature	CRI
	Min.	Max.	Min.	Max.		
12 LED	30W	40W	3600	4400	3000K- 4000K- 5000K- 6000K- 6500K-	CRI > 70
24 LED	60W	80W	7200	8800		
36 LED	90W	120W	10800	13200		
48 LED	120W	160W	14400	17600		
60 LED	150W	200W	18000	22000		
72 LED	180W	240W	21600	26400		
84 LED	210W	280W	25200	30800		
96 LED	240W	320W	28800	35200		
108 LED	270W	360W	32400	39600		
120 LED	300W	400W	36000	44000		





"LIGHTNING THE BIGGEST AIRPORT CONSTRUCTION AREA OF THE WORLD" - "ISTANBUL GRAND AIRPORT"

### LIGHT DISTRIBUTION CURVES

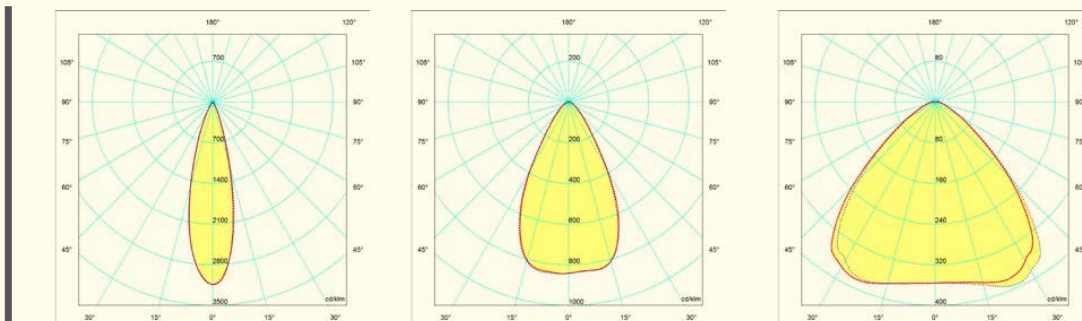

# Recessed Flat-G 02110

# Recessed LUNA-019 05393



### Housing

Steel sheet with electrostatic powder coating.

### Optics

Opal diffuser

### Light Source



High efficacy Mid Power LED with lifetime L70 > 50,000h

### Driver

Constant current output with pf > 0.90

### Color Options

RAL9016 / RAL9006 / RAL9005

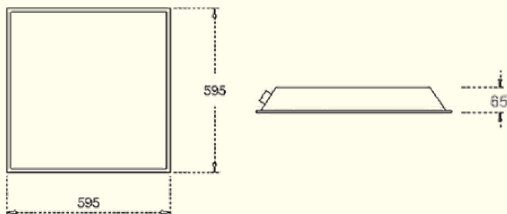

W	Lm	K	Ra	Kg
27	2900	3000	> 80	4,6
31	3250	3000	> 80	4,6
33	3600	3000	> 80	4,7
35	4000	3000	> 80	4,7
27	3000	4000	> 80	4,6
31	3350	4000	> 80	4,6
33	3700	4000	> 80	4,7
35	4100	4000	> 80	4,7



### Housing

Die-cast aluminum with electrostatic powder coating

### Optics

Opal diffuser

### Light Source



High efficacy Mid Power LED with lifetime L70 > 50,000h

### Driver



Constant current output with pf > 0.90

### Color Options

RAL9016 / RAL9006 / RAL9005

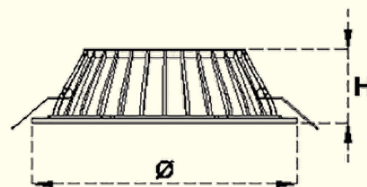

W	Lm	K	Ra	Kg	ØxH	Cut-out
13	1315	3000	> 80	0,6	190x63	175
19	1915	3000	> 80	1,0	190x63	175
13	1370	4000	> 80	0,6	190x63	175
19	1995	4000	> 80	1,0	190x63	175

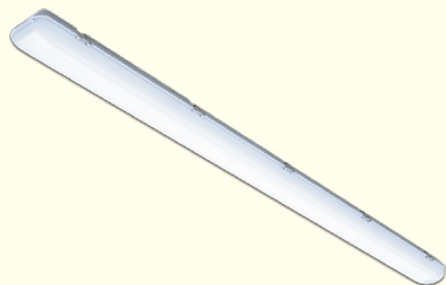

**Housing**

Polycarbonate

**Optics**

Opal polycarbonate diffuser

**Light Source**



High efficacy Mid Power LED with lifetime L70 > 50,000h

**Driver**


Constant current output with pf > 0.90

**Gasket**

Water and dust proof

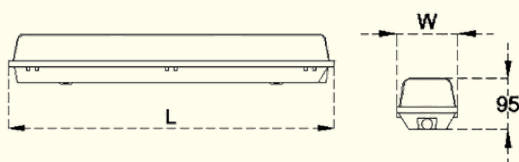

W	Lm	K	Ra	W x L
10	1115	3000	>80	95x680
35	3853	3000	>80	95x1580
20	2358	3000	>80	95x1200
29	3203	3000	>80	95x1200
41	4295	3000	>80	95x1200
10	1161	4000	>80	95x680
35	4014	4000	>80	95x1580
20	2456	4000	>80	95x1200
29	3336	4000	>80	95x1200
41	4474	4000	>80	95x1200



**Housing**

Electrostatic powder painted aluminium profile

**Optics**

Opal polycarbonate diffuser

**Light Source**


High efficacy Mid Power LED with lifetime L70 > 50,000h

**Driver**


Constant current output with pf > 0.90

**Color Options**



RAL9016 / RAL9006 / RAL9005



W	Lm	K	CRI	W x L x H
14	1300	3000	Ra >80	43x580x67
27	2700	3000	Ra >80	43x1130x67
41	4100	3000	Ra >80	43x1680x67
14	1400	4000	Ra >80	43x580x67
27	3000	4000	Ra >80	43x1130x67
41	4400	4000	Ra >80	43x1680x67




**Housing** Matte, anodized, extruded aluminum profile  
**Optics** Highly transmissive PC opal diffuser  
**Light Source** MacAdam Step-3 high efficacy Mid Power LED with lifetime L70 > 50,000h  
**Driver** Constant current output, Pf>0.90  
**Supply Voltage** 220-240V/50-60Hz  
**Operating Temperature** -20C/+40C  
**Options** DALI  
 3h emergency lightig kit

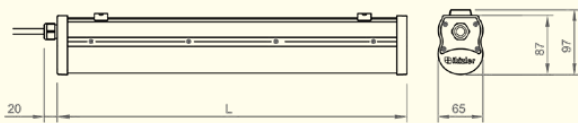


W	Lm	CCT	CRI	L (mm)	Kg
19	2053	3000	Ra>80	600	1,4
20	2173	3000	Ra>80	880	2,0
29	3079	3000	Ra>80	880	2,0
42	4229	3000	Ra>80	880	2,0
29	2897	3000	Ra>80	1160	2,7
38	4106	3000	Ra>80	1160	2,7
48	5130	3000	Ra>80	1440	3,3

19	2139	4000	Ra>80	600	1,4
20	2264	4000	Ra>80	880	2,0
29	3208	4000	Ra>80	880	2,0
42	4405	4000	Ra>80	880	2,0
29	3018	4000	Ra>80	1160	2,7
38	4278	4000	Ra>80	1160	2,7
48	5340	4000	Ra>80	1440	3,3



**Housing** Matte, anodized, extruded aluminum profile  
**Optics** Highly transmissive PC opal diffuser  
**Light Source** MacAdam Step-3 high efficacy Mid Power LED with lifetime L70 > 50,000h  
**Driver** Constant current output, Pf>0.90  
**Supply Voltage** 220-240V/50-60Hz  
**Operating Temperature** -20C/+40C  
**Options** DALI  
 3h emergency lightig kit



**Color Options**  
 Ral 9016 Ral 9006 Ral 9005

W	Lm	CCT	CRI	L	Kg
11	1313	3000	Ra>80	390	0,5
17	2030	3000	Ra>80	510	0,7
21	2510	3000	Ra>80	750	1,0
29	3348	3000	Ra>80	750	1,0
23	2745	3000	Ra>80	1230	1,6
35	4178	3000	Ra>80	1230	1,6
48	5735	3000	Ra>80	1230	1,6
42	5015	3000	Ra>80	1470	1,9
57	6805	3000	Ra>80	1470	1,9

11	1397	4000	Ra>80	390	0,5
17	2160	4000	Ra>80	510	0,7
21	2670	4000	Ra>80	750	1,0
29	3546	4000	Ra>80	750	1,0
23	2920	4000	Ra>80	1230	1,6
35	4445	4000	Ra>80	1230	1,6
48	6100	4000	Ra>80	1230	1,6
42	5335	4000	Ra>80	1470	1,9
57	7240	4000	Ra>80	1470	1,9

## REFERENCES


 <p>iGA İstanbul Grand Airport</p>	 <p>Limak</p>	 <p>MAPA İnşaat</p>	 <p>asyaport</p>	 <p>aras Elektrik Dağıtım Anonim Şirketi</p>
 <p>İCİÇTAŞ İnşaat</p>	 <p>TCK</p>	 <p>aksa ENERJİ</p>	 <p>B</p>	 <p>ÇEDAŞ CAMLIBEL ELEKTRİK DAĞITIM A.Ş.</p>
 <p>CORUH ELEKTRİK ÇORUH ELEKTRİK DAĞITIM A.Ş.</p>	 <p>DİCLE EDAS</p>	 <p>FIRAT ELEKTRİK FIRAT ELEKTRİK DAĞITIM A.Ş.</p>	 <p>GDZ Gediz Elektrik Dağıtım A.Ş.</p>	 <p>Akedas Elektrik Dağıtım A.Ş.</p>
 <p>TREDAS TRAKVA ELEKTRİK DAĞITIM A.Ş.</p>	 <p>sedaş</p>	 <p>ayedaş</p>	 <p>ADM</p>	 <p>Osmanгази Elektrik Dağıtım A.Ş.</p>
 <p>UEDAŞ ULUDAĞ ELEKTRİK DAĞITIM A.Ş.</p>	 <p>VEDAŞ Vangözü Elektrik Dağıtım A.Ş.</p>	 <p>BEYLİKDÜZÜ BELEDİYESİ</p>	 <p>GEYİKLİ BELEDİYESİ 1971</p>	 <p>TOSB Otomotiv Yan Sanayi İhtisas Organize Sanayi Bölgesi</p>
 <p>parkvillage</p>	 <p>ASTER TEXTİLE</p>	 <p>halkalı kağıt® karton sanayi ve ticaret A.Ş.</p>	 <p>ileri group</p>	 <p>ALL STAR ALLSTAR HALISAHA</p>

# PROJECTS

Istanbul Airport Outdoor Lighting 2019



Asya Port Harbour Lighting 2019

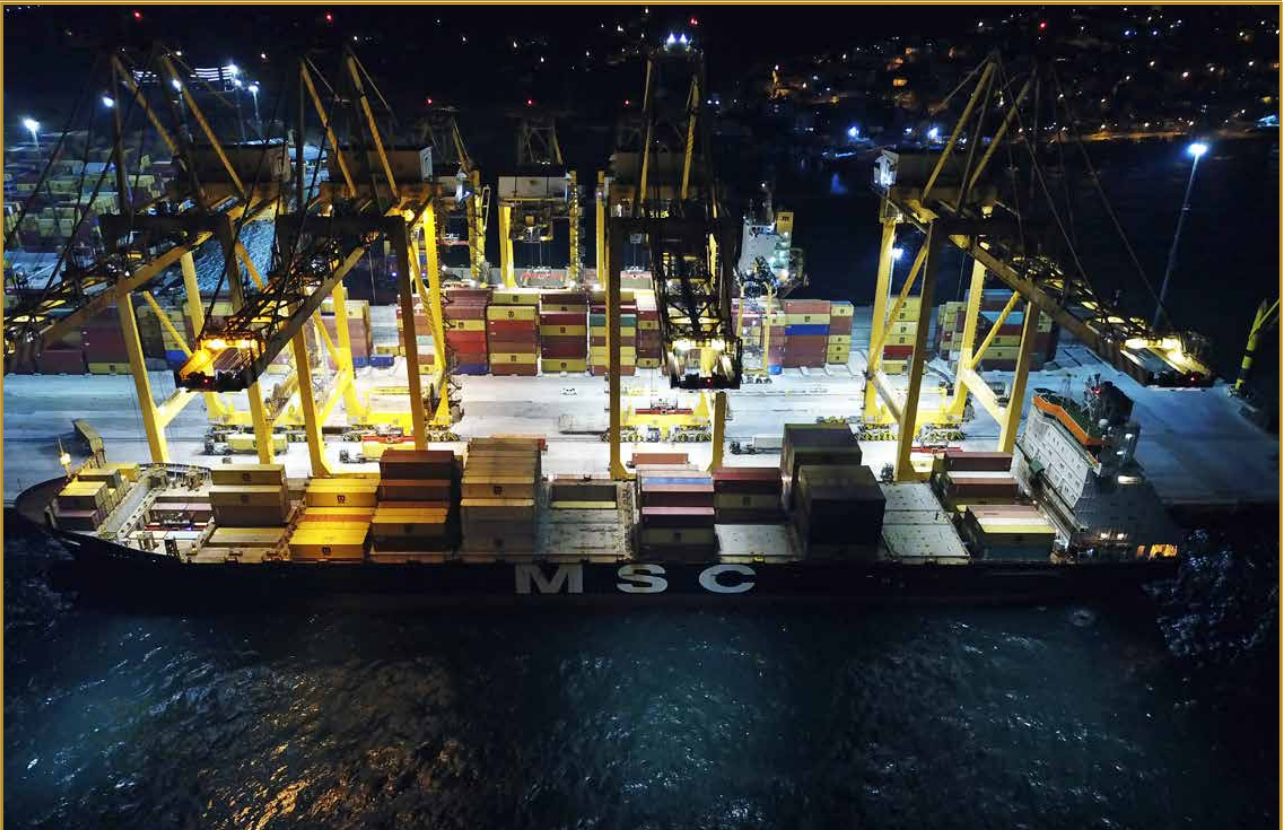




# PROJECTS

## Istanbul Airport Construction Area Lighting 2018

“Lightning the Biggest Airport Construction Area of the World” – “Istanbul Airport”



## Kuwait Airport New Terminal Building Construction Area Lighting 2019

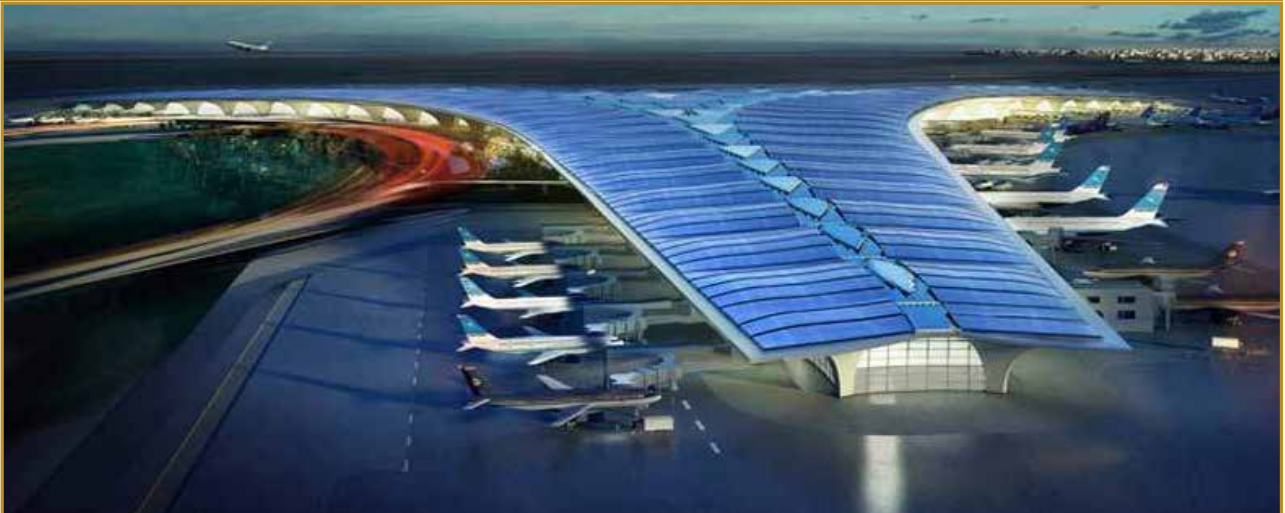

## Park Village Building Complex Outdoor Lighting 2016









## GRUP İMAJ AYDINLATMA SAN. VE TİC. A.Ş.

### HEAD OFFICE & FACTORY 1

T +90 212 689 93 08-09-10 (pbx)

F +90 212 689 93 11

A Deniz Aktaş Cad. No: 6 Kavaklı, Beylikdüzü İSTANBUL

### FACTORY 2

T +90 212 857 22 32

A Beylikdüzü Osb Mahallesi Mermerciler Sanayi Sitesi 87. Sk.  
No:6 34520 Beylikdüzü İSTANBUL



[www.grupimaj.com](http://www.grupimaj.com)

f Grup-İmaj-Aydınlatma-San-Tic-Aş

t Grupimajj

